



C70G77



C70G

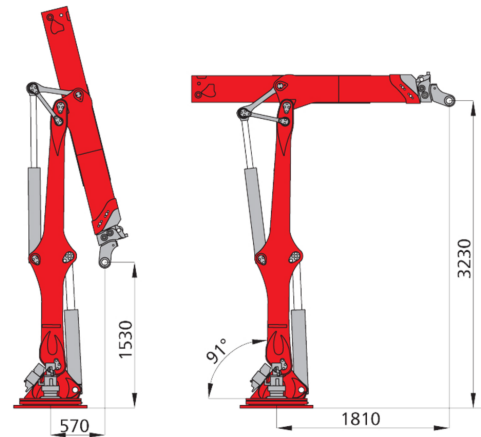



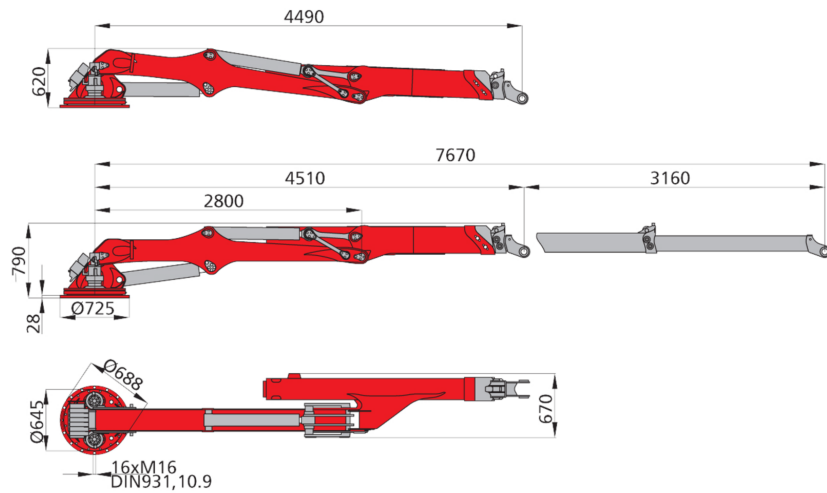


C70G77	2350	1750	1360	1120	950 kg
	3m	4m	5m	6m	7m


lifted weight, net without accessories

crane type	C70G
boom system	77
lifting moment net	[kNm] 70
slewing torque net	[kNm] 17
slewing angle	[°] 316
max. outreach	[m] 7,7
operating pressure	[bar] 240
recommended pump capacity	1K [l/min] 1x80
	1K LS [l/min] 1x120
dead weight without link / rotator	[kg] 1100

WORKING RANGE

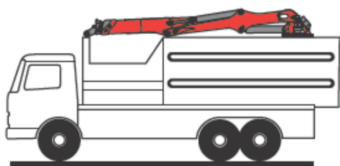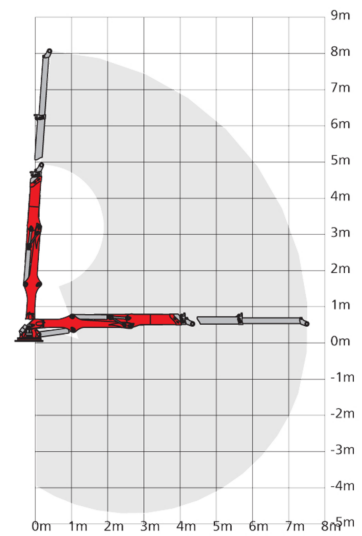

Installation on top of compactor saves space. Shorter wheel-base respectively extra loading volume possible.

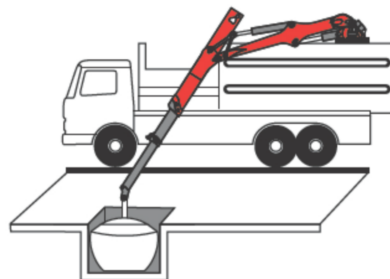

Ideal crane geometry for handling of subterranean containers



Excellent hook clearance for discharging of containers without any problem